



Your Reliable and Trustworthy Surplus Equipment Market Partner... Worldwide

Integra Hexa O/S (JAD-37370)

Make: Integra
Model: Hexa O/S
Quantity: (3)
Inspection: With P.O.

Configuration:

- **Package:** BGA 9x11, 12x18, 14x18
- **Vision Module & Camera:**
 - **Top & bottom:** 4M Camera with 20um pixels (Win 7)
 - **2D & 3D Vision:** 4M Camera with 20um pixels (Win XP)
- **Machine OS:** Windows 2000
- **Machine Size:** 2000mm(L)x1800mm(B)x1475mm(H)
- **Machine Weight:** 1500Kg
- **Handler PSU:** 110VAC or 230VAC, 20A -30A, Single Phase 50/60Hz
- **Handler Breaking Capacity:** 6KA
- **Air Supply:** 5 – 7 Bar
- **Air Supply Flow Rate:** 130 l/min
- **Input:** Tray
- **Output:** Tray



Your Reliable and Trustworthy Surplus Equipment Market Partner... Worldwide

Photos: Machine Serial 1522





Your Reliable and Trustworthy Surplus Equipment Market Partner... Worldwide

Photos: Machine Serial 1456





Your Reliable and Trustworthy Surplus Equipment Market Partner... Worldwide


Photos: Machine Serial 1549





Your Reliable and Trustworthy Surplus Equipment Market Partner... Worldwide

Photos: Machine Layout

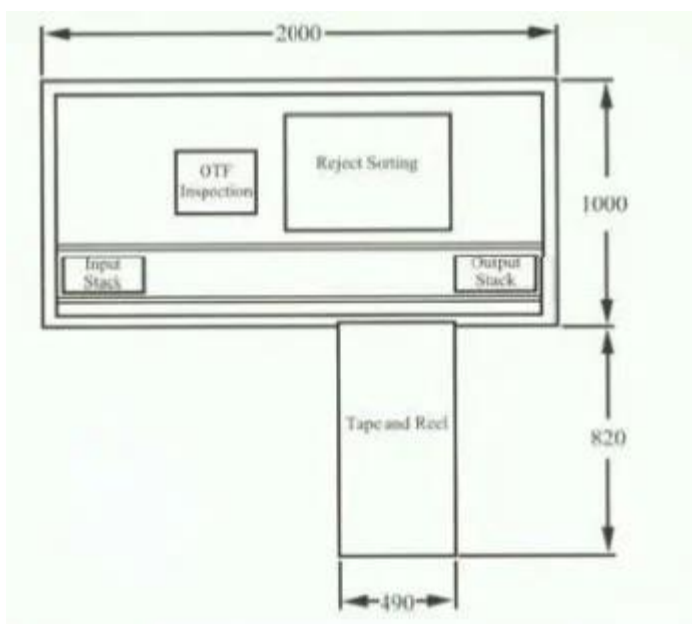



Your Reliable and Trustworthy Surplus Equipment Market Partner... Worldwide

Photos: Machine Config

SPECIFICATIONS		DESCRIPTION	FACILITIES
Package Types		Peripheral Leaded Packages: eg. TQOP type I & II, QFP Area Array packages: eg. BGA, BOC Leadless Packages: eg. LCC, MLF	Footprint See Layout AC Power Supply 110V/230V Air: 5 Bar minimum
Tray Stack Details			
Tray type		JEDEC & EIAJ	
Maximum tray stack		40 thin tray	
OTF Inspection Details			
Leads		Bent leads Pitch Tweeze Sweep Cross Package Lead Width Coplanarity (3D) Standoff (3D)	USER INTERFACE - Windows NT platform with GUI - Full machine diagnostics capability
Balls		Displacement X Displacement Y Pitch X & Y Diameter Coplanarity (3D) Ball Height (3D)	OPTIONS - Integration for factory networking (SECS/GEM) - Native language display capability - Real-time Statistical Process Control capability - Wrong Orientation Corrector
Tape & Reel Details		Jumbo Reel capability Auto tape cutter Dual taping module	
PVI (Optional)		Void, crack, scratch, orientation, chipoff, white contamination	
Symbol Inspection Details		Mixed symbol, broken symbol Wrong symbol, no symbol	